


1 2 3 4 5 6 7 8

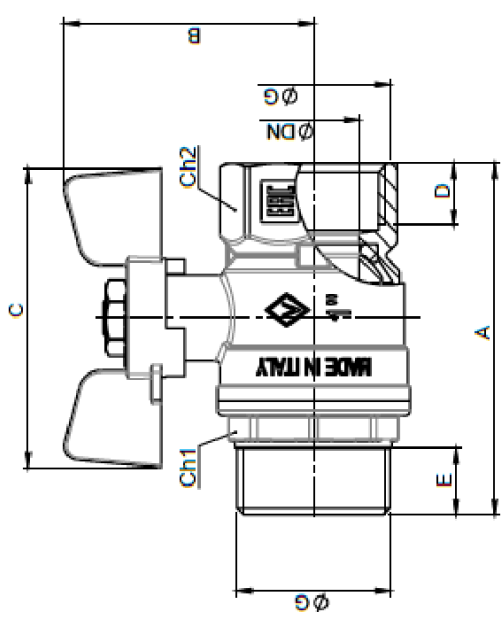

ART.525	
<i>Brass ball valve, M-F, with aluminium T-handle, Size from 1/2" to 1 1/4"</i>	
SPECIFICATION	
Series	500
Thread ends	Male-Female: ISO 228/1
Orifice	from 15 to 32 mm
Actuator	90° Rotation with mechanical stop
Operator	Aluminium T-Handle
APPLICATION	
Assembly in rigid pipe system	
Nominal pressure (PN) in bar: 20-40	
KV: flowrate coefficient m ³ /h	
Direction of flow: as desired	
Temperature range: -20 °C / +120°C	
Use: Water	

N°	Descrizione	Description	Materials	Treatment	Q.ty
1	Corpo	Body	CW617N	Nickel-Plated	1
2	Manicotto	End connection	CW617N	Nickel-Plated	1
3	Guarnizione	Ball seal	PTFE		2
4	Sfera	Ball	CW617N	Ni+Cr	1
5	Perno	Stem	CW614N		1
6	Guarnizione inferiore	Lower seal	PTFE		1
7	O-Ring	O-Ring	NBR70sh		1
8	Guarnizione superiore	Upper seal	PTFE		1
9	Dado	Nut	STEEL UNI 5771	Zinc-Plated	2
10	Rondella	Brass ring	CW614N		1
11	Farfalla	T-handle	ALUMINIUM	Painted	1

Denominazione particolare / Name: Valvola a sfera, M-F, con farfalla in alluminio
 Materiale / Material:

Disegnato / Designed by: **A3**
 Approvato / Approved by:

Formato / Format: **A3**
 Lavoro / Finished Code:

Data / Date:
 Scale / Size: **1:1**
 Foglio / Tab.: **1/1**
 Valido per / Available for: **Consultazione**

Cycle senza indicazione di lavorazione: **MEDIA UNI-ISO 2768/1**
 Rappres. Geometriche Generali:

Test. Superficie / Surface Treat. Test. Termico / Thermal Treat. Serie / Project N°: **Nichelatura**
 N° Disegno / Drawing N.: **Art.525**
 Revisione / Revision: **-**
 Peso / Weight: **-**
 Milimetri / Size: **1/2"-1"1/4**

TDM IN ASS

UFFICIO TECNICO

DN	G	A	B	C	D	E	Ch1	Ch2	KV	PN
15	1/2"	55	40.5	53	10	11	22	25	11.2	40
20	3/4"	61	43	53	11	12	28	31	23.5	25
25	1"	74	53.5	63	13	14	34	38	32	25
32	1 1/4"	84	58.5	73	14	15	43	47	67.2	20

